


# STANLEY NEW RANGE OF TORQUE WRENCH

## Digital Torque Wrench

SD Series

Calibrate- (5000 cycles or 1 year recommended)

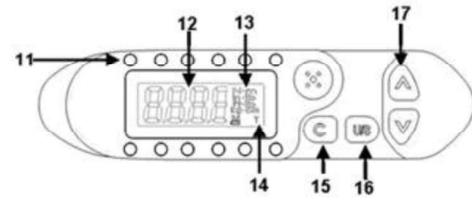

- 11. LED Indicator
- 12. Torque Value
- 13. Unit (**N-m**, ft-lb, in-lb, kg-cm)
- 14. Peak/Track Mode
- 15. Power on/Clear Button
- 16. Unit/Setting Button
- 17. Up/Down Button




Round head square drive ratchet head



Bright LED light- Green 90% target; Red Approached Target

Control panel 0.01N.m resolution

Anti-slip handle

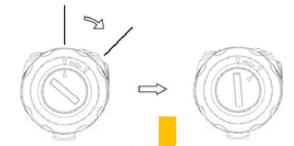

End cap battery insert



Dial type direction changer

CrV alloy steel body

Digital display

Speaker for beep sound indication

Battery compartment



# STANLEY NEW RANGE OF TORQUE WRENCH

## Digital Torque Wrench

SD Series



Model	Square drive (inches)	Max. operation range
SD-030-22	1/4	30 N-m / 22.12 ft-lb / 265.5 in-lb / 306.1 kg-cm
SD-135-22	3/8	135 N-m / 99.5 ft-lb / 1195 in-lb / 1378 kg-cm
SD-200-22	1/2	200 N-m / 147.5 ft-lb / 1770 in-lb / 2041 kg-cm
SD-340-22	1/2	340 N-m / 250.7 ft-lb / 3009 in-lb / 3469 kg-cm

# STANLEY NEW RANGE OF TORQUE WRENCH

Model No.	Max. Operation Range (N-m)	Square Drive (inches)	Measured Torque Range (N-m)	Length (mm)
SD-030-22	30	1/4	1.5~30	390
SD-135-22	135	3/8	6.8~135	410
*Alarm setting range varies from the length of selected head. *The setting range listed above is using standard head which included with each package.				
<b>SPECIFICATIONS</b>				
Accuracy *1	CW: ± 4% from 5% to 20% / ±2% from 20% to 100% CCW: ± 4% from 5% to 20% / ±3% from 20% to 100%			
Bright LED	12 LED/ 4Reds+8Greens			
Operation Mode	Peak hold / Track			
Unit Selection	N-m, ft-lb, in-lb, kg-cm			
Head Type	Round Head Ratchet Insert			
Size (W×H)	12 × 9 mm			
Axial Distance	17.5 mm			
Gear Teeth	52			
PC Connectivity	No			
Battery	AA x 2			
Humidity	Up to 90% non-condensing			
Drop Test	1 m			
Vibration Test *3	10G			
Environmental test *4	Pass			
Electromagnetic compatibility test *5	Pass			

Model No.	Max. Operation Range (N-m)	Square Drive (inches)	Measured Torque Range (N-m)	Length (mm)
SD-200-22	200	1/2	10~200	545
SD-340-22	340	1/2	17~340	640
*Alarm setting range varies from the length of selected head. *The setting range listed above is using standard head which included with each package.				
<b>SPECIFICATIONS</b>				
Accuracy *1	• CW± 4% from 5% to 20% / ±2% from 20% to 100% • CCW± 4% from 5% to 20% / ±3% from 20% to 100%			
Bright LED	12 LED/ 4Red+8Green			
Operation Mode	Peak hold / Track			
Unit Selection	N-m, ft-lb, in-lb, kg-cm			
Head Type	Round Head Ratchet Insert- Detachable			
Size (W×H)	18 × 14 mm			
Axial Distance	25 mm			
Gear Teeth	52			
PC Connectivity	No			
Battery	AA x 2			
Humidity	Up to 90% non-condensing			
Drop Test	1 m			
Vibration Test *3	10G			
Environmental test *4	Pass			
Electromagnetic compatibility test *5	Pass			

# OPERATIONS



**STANLEY**